




EZ Way, Inc.

*"Your Partner In
Safe Patient Handling"*

eZ Xtract® Lift

Features and Specifications – EZ Xtract 750 lb. Capacity

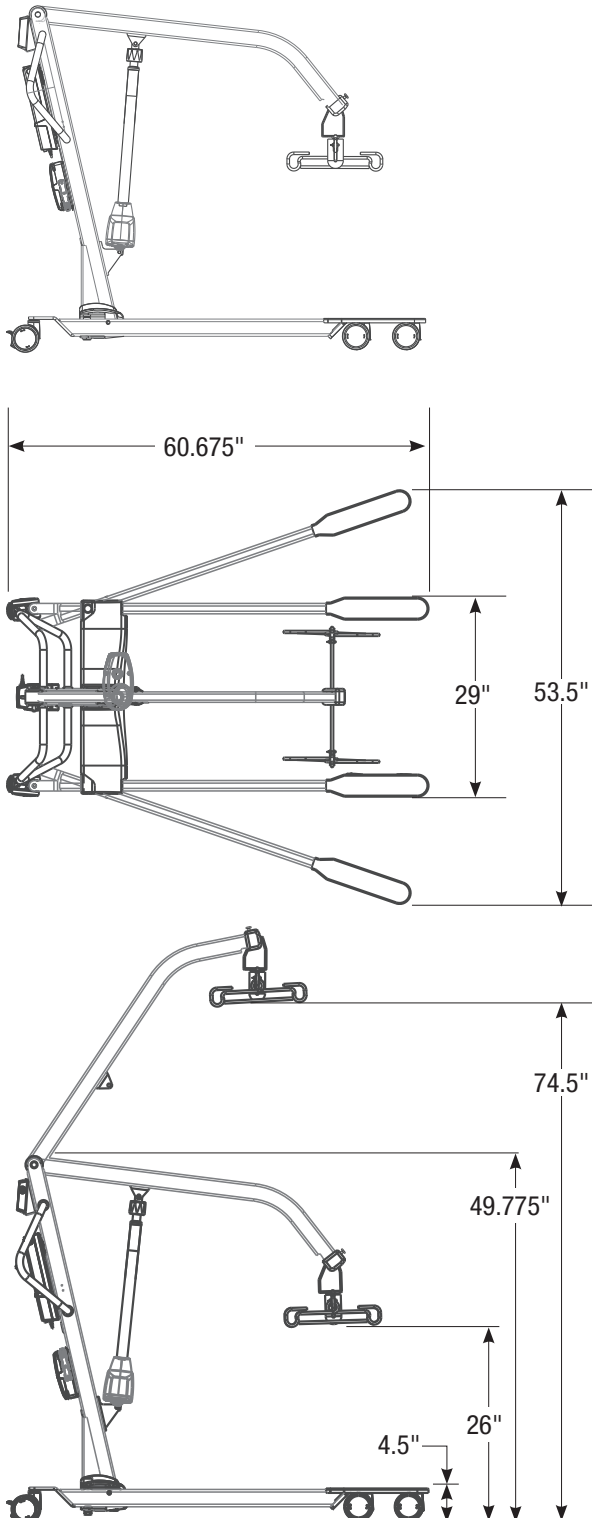

► Frame:

- All steel construction
- Power leg spreading
- Clearance with standard casters - 4.5"
- Baked epoxy powder coated paint
- Weight with battery pack – 143 pounds
- Lift range 26" - 74.5" total travel

► Covers and Bumpers:

- ABS plastic covers on base and foot of leg

► Casters:

- Front: Two 4" double rubber tread swivel
- Rear: Locking, 4" double rubber tread swivel
- Hand Control:
- Impact resistant, IPX 6 rated, encased magnet, built-in LCD display

► Motor Actuator:

- Acme screw design
- Built in safety switch for down stroke
- Automatically stops at top and bottom of stroke
- CE certified
- Manual lowering capability if there is a power failure

► Battery Pack: (2 per Lift)

- Lithium Ion
- 1-125.7V, 2.9 AMP/HR
- Approximately 100 lifts per charge
- Battery Charger Unit:
- 110 volt input/24 volt output
- Approved to UL Standards
- 4 hour charge

► Electronics:

- Three methods to control the unit, hand control, buttons on the Secondary Control Panel, raise and lower boom from control box.
- Built-in LCD displays in hand control shows battery level, patient weight (if equipped), and diagnostic functions
- Automatically shuts off after non-use
- Over-discharge protection
- Usage time captured: Lift usage time is captured in minutes, great for tracking frequency of use
- Overload protection
- Displays weight in pounds or kilograms